


2-Way-Splitter asymmetric 4.77 dB




not binding

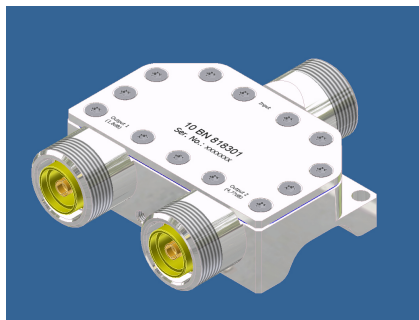

block diagram

Part number	BN 818301	
Connectors	7-16 female (50 Ohms)	
Splitting ratio	1 : 1/3 : 2/3	
Frequency range	694 – 2700 MHz	
Insertion loss	Input to Output 1	~ 1.8 dB
Coupling	Input to Output 2	4.77 dB ± 0.6 dB
VSWR	≤ 1.3 (Port 1)	
Power rating	500 W CW	
IM – value 3rd order @ 2 x 20 W	≤ -155 dBc typical: ≤ -160 dBc	
Degree of protection	IP 65 (outdoor)	
Environmental conditions	ETSI EN 300019-1-1 Class 1.2 ETSI EN 300019-1-2 Class 2.3 ETSI EN 300019-1-4 Class 4.1E	
Weight	0.54 kg	
Temperature range	-40 °C – +70 °C	

Dimensions:

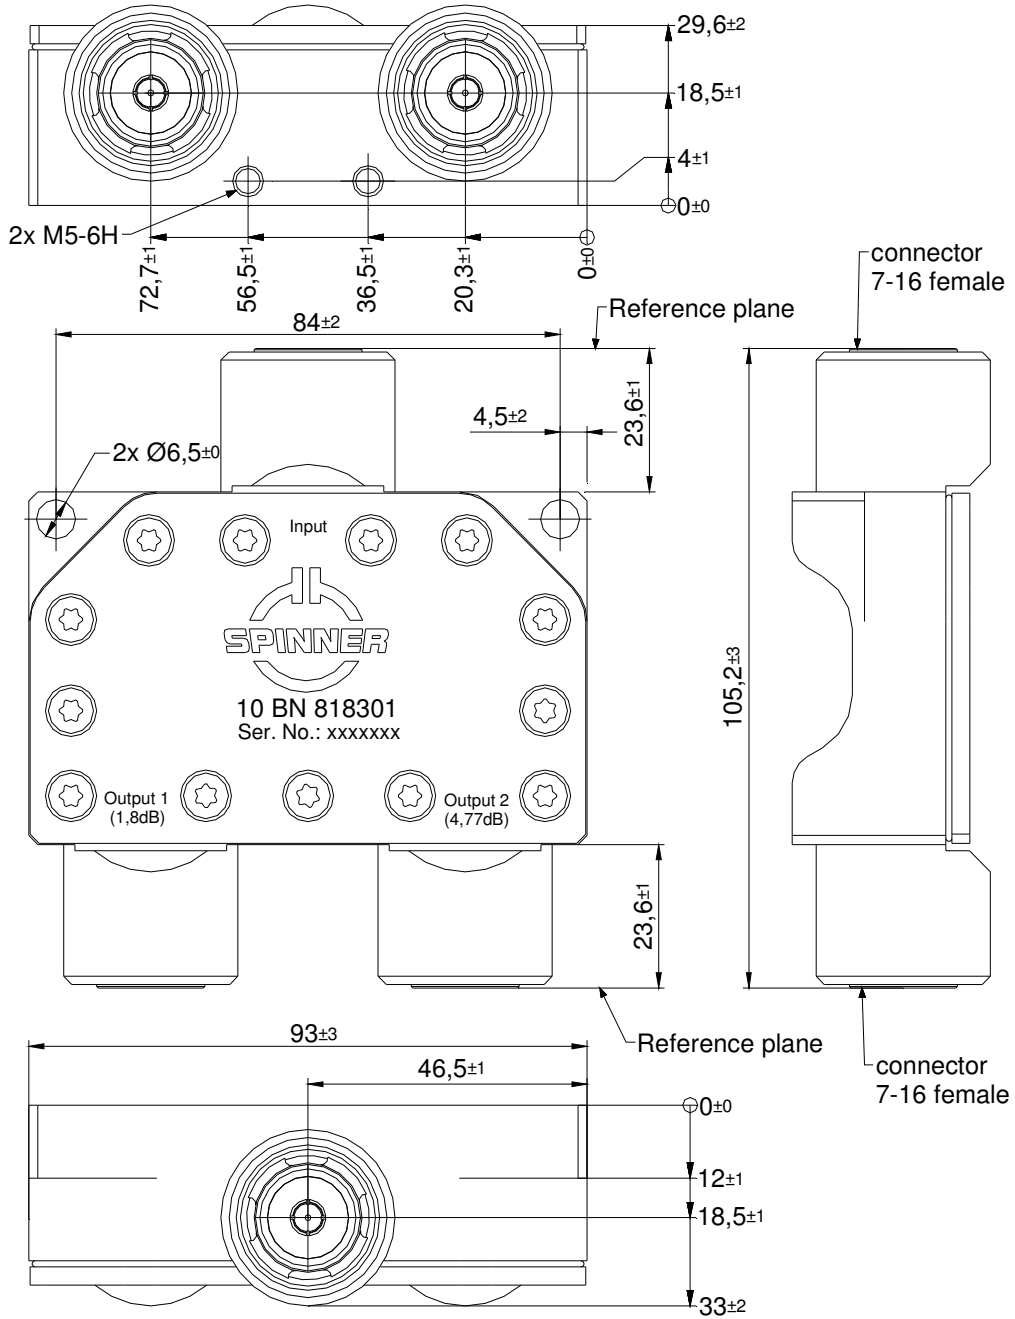


Standard:

7-16 female (50 ohms): CECC 22190, IEC 61169-4

modifications reserved

Measurements:

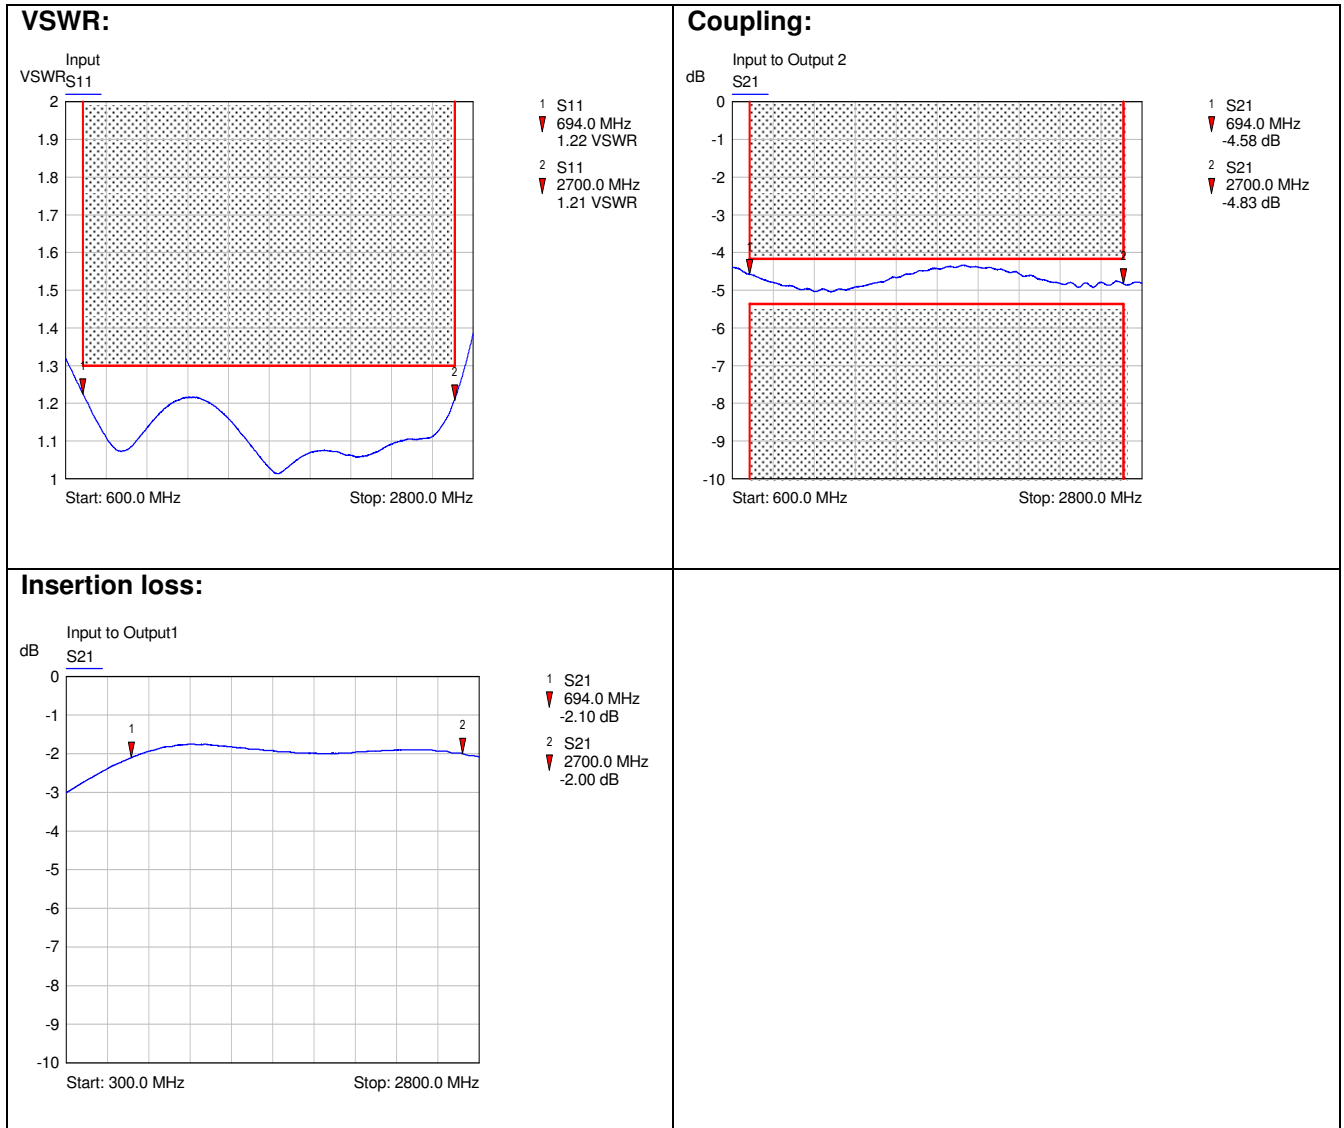

Signal splitting ratios (approximate values, for information only):

