


PORT SAVER || BN 533916C0001

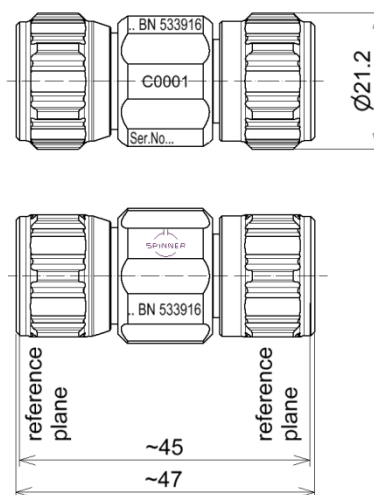

all dimensions in millimeter

Radio frequency characteristics

Interface type	N plug / plug per IEC 61169-16
Frequency range	DC to 18 GHz
Impedance	50 Ω
Return loss, min.	38 dB @ DC to 4 GHz 34 dB @ 4 to 8 GHz 28 dB @ 8 to 18 GHz

General mechanical data

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	copper alloy/ gold-plated
Insulation	PMP
Other metallic parts / surface finish	copper alloy / nickel-plated
Weight, approx.	0.08 kg
Marking	laser engraving

General environmental conditions

Operation	
Ambient temperature range	+18 to +28°C
Storage	
Ambient temperature range	-40 to +70°C
Relative humidity	95% (non condensing)

Delivery

Packaging	transparent plastic tube
-----------	--------------------------