


PORT SAVER || BN 533918C0001

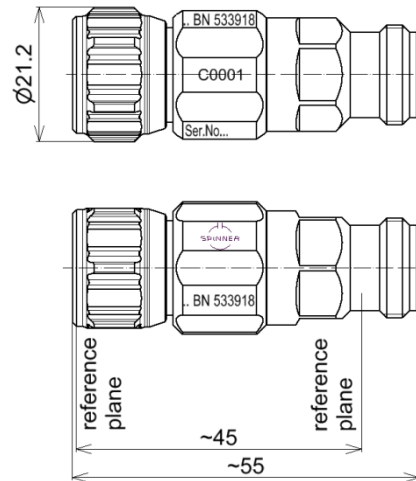

all dimensions in millimeter

Radio frequency characteristics

| | |
|-------------------|--|
| Interface type | N plug / socket per IEC 61169-16 |
| Frequency range | DC to 18 GHz |
| Impedance | 50 Ω |
| Return loss, min. | 38 dB @ DC to 4 GHz 34 dB @ 4 to 8 GHz 28 dB @ 8 to 18 GHz |

General mechanical data

| | |
|--|---------------------------------|
| Center conductor material / surface finish | CuBe age hardened / gold-plated |
| Outer conductor material / surface finish | copper alloy/ gold-plated |
| Insulation | PMP |
| Other metallic parts / surface finish | copper alloy / nickel-plated |
| Weight, approx. | 0.09 kg |
| Marking | laser engraving |

General environmental conditions

| | |
|---------------------------|----------------------|
| Operation | |
| Ambient temperature range | +18 to +28°C |
| Storage | |
| Ambient temperature range | -40 to +70°C |
| Relative humidity | 95% (non condensing) |

Delivery

| | |
|-----------|--------------------------|
| Packaging | transparent plastic tube |
|-----------|--------------------------|