


Coaxial Load || BN 537702

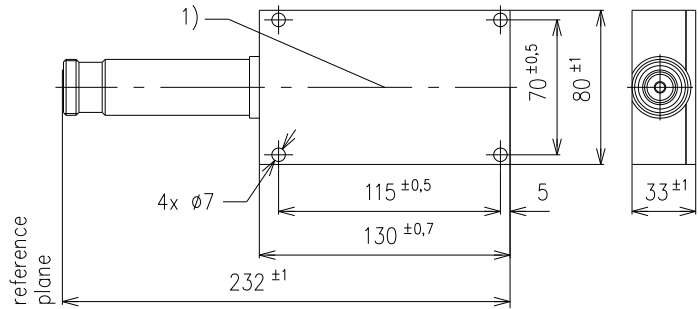

all dimensions in millimeter

Interface type	7-16 socket (50 Ω) per IEC 61169-4
VSWR, max.	1.06 @ DC to 860 MHz
Frequency range	DC to 860 MHz
Average power capability, max.	1.25 kW 2)
Proof voltage, max.	2 kV
Inner conductor material / surface finish	copper alloy / silver plated
Outer conductor material / surface finish	copper alloy / silver plated
Case material / surface finish	aluminum / no finish
Other metal parts / surface finish	stainless steel / no finish
Insulation	PTFE
IP protection level	IP40 per EN 60529
Weight, approx.	1.2 kg
Ambient temperature range	-40 to +40 °C
Temperature of housing, max.	+110 °C 2)
Operating position	any

1) Measuring point for surface temperature

2) Mount on appropriate cooling system, the surface temperature at measuring point 1) may not exceed 110 °C