


Precision Adaptor || BN 876783

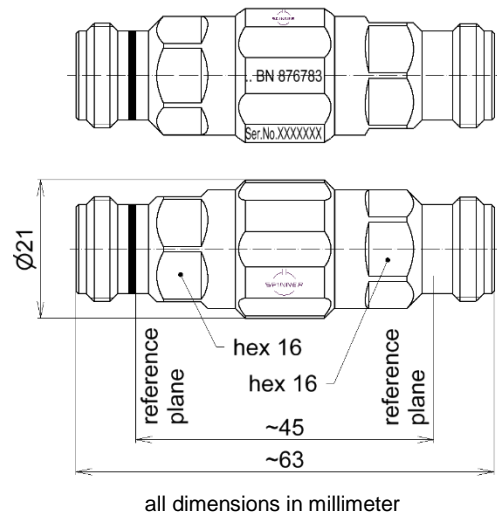

Radio frequency characteristics

| | |
|-----------------|--|
| Interface type | N socket 50 Ω / N socket 75 Ω per IEC 61169-16 |
| Frequency range | DC to 18 GHz |
| Impedance | 50 Ω / 75 Ω (unmatched) |

Mechanical characteristics

| | |
|--|---------------------------------|
| Center conductor material / surface finish | CuBe age hardened / gold-plated |
| Outer conductor material / surface finish | copper alloy / gold-plated |
| Insulation | PMP, cross linked polystyrene |
| Weight, approx. | 0.09 kg |
| Marking | laser engraving |

Environmental conditions

| | |
|---------------------------|----------------------|
| Operation | |
| Ambient temperature range | +5 to +45°C |
| Storage | |
| Ambient temperature range | -40 to +70°C |
| Relative humidity | 95% (non-condensing) |

Scope of delivery and accessories

| | |
|-------------------|-----------------|
| Scope of delivery | protective caps |
|-------------------|-----------------|

SPINNER GmbH
 This document is proprietary to us.
 All rights reserved. Any use, transfer, or reproduction of this document
 or the know-how contained therein requires our express consent.