


PCB-Launch Connector “SPINNER EasyLaunch” || BN 533402

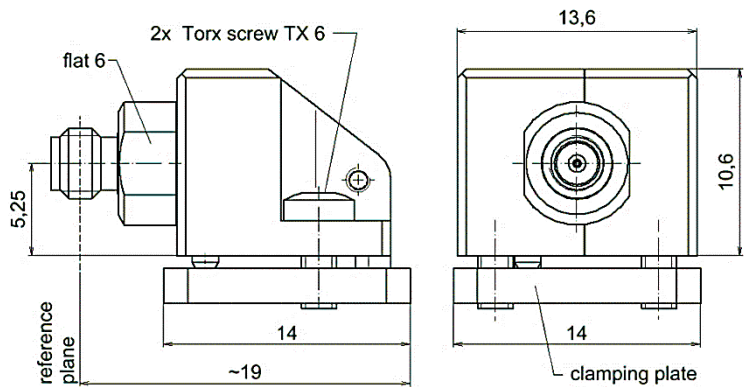

all dimensions in mm

Radio frequency characteristics

Interface type	1.0 mm socket per IEC 61169-31
Frequency range	DC to 110 GHz
Impedance	50 Ω
Return loss, typ.	10 dB @ DC to 110 GHz

Mechanical characteristics

Center conductor material / surface finish	CuBe age hardened / gold-plated
Outer conductor material / surface finish	CuBe, copper alloy / gold-plated
Insulation	PEI
Other metallic parts / surface finish	copper alloy / nickel-plated
Installation type	solderless

Environmental conditions

Operation	
Ambient temperature range	-40 to +85°C

Applicable documents

PCB-Layouts	62424
Mechanical PCB-Design	D04825-0E
Installation instruction	M36272